


A

B

C



D

E

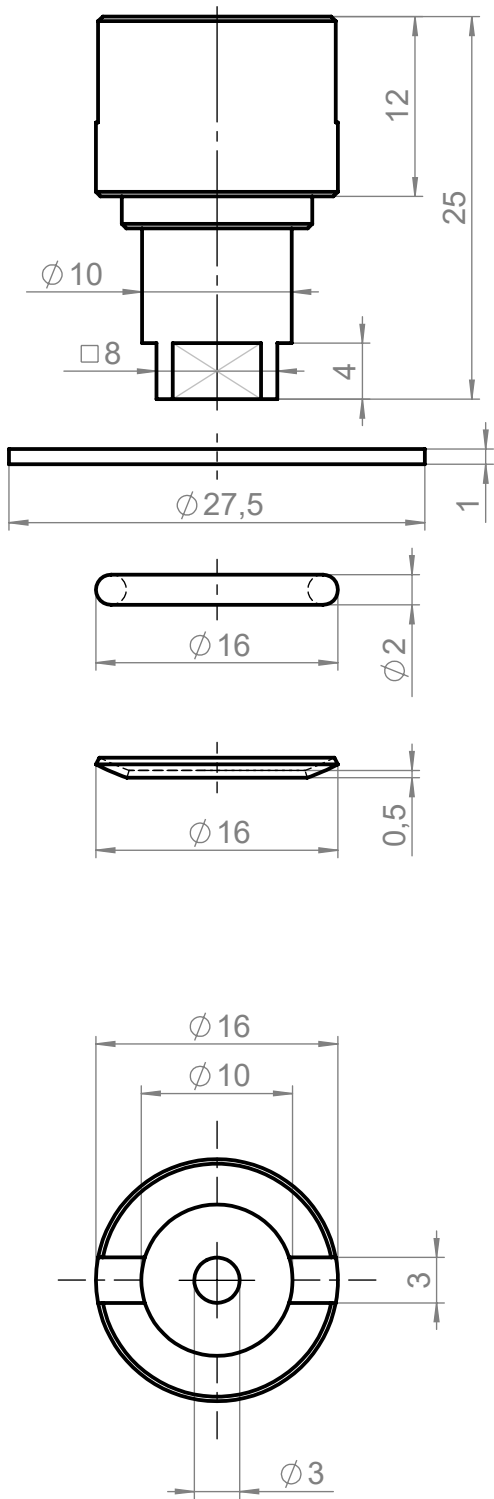

Benennung / Description	Material / Material	Oberflächenbehandlung / Surface finish
Einsatz / lock insert	Edelstahl / stainless steel 1.4305 (AISI 303)	----
Stift / pin	Edelstahl / stainless steel 1.4305 (AISI 303)	----
Federscheibe / spring washer	Edelstahl / stainless steel 1.4310 (AISI 301)	----
Aussendichtung / outside seal	NBR, schwarz / NBR, black	----
O-Ring / o-ring	NBR, schwarz / NBR, black	----
Betätigung / Actuation	Doppelbart 3mm / two-way key bit 3mm	----
Schutzart / Protection class	IP 65	----

M 1:1

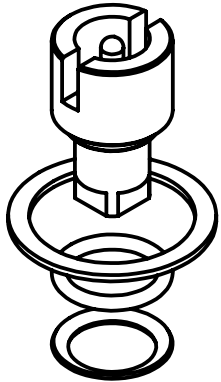

[mm]

standing part

permissible deviation

surface

ISO 1302

material

STUV Mat.-Nr. ---

dimensions

35,17 g
cm³

date

name

edited by

23.03.22

j.radam

checked by

29.03.22

v.manteca

standard

Steinbach & Vollmann

GmbH
42579 Heiligenhaus
www.stuv.de



drawing number

02411010

scale

2:1

format

A4H

page

01

from

XII index

modification

date

name

origin: 024110100000

Ers. f.:

Ers. d.: