


AL

VA

mit unsichtbarer Verschraubung

with concealed screw mounting

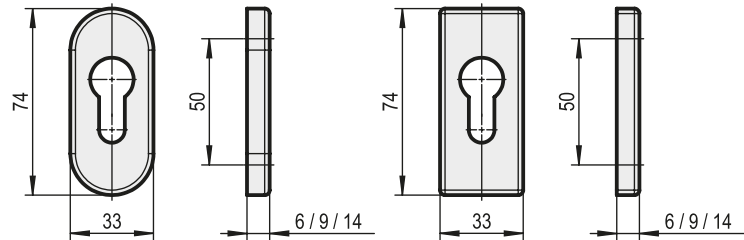


Oberfläche / Surface	Form / Design	Ausführung / Version			Form / Design	Ausführung / Version		
		6 mm	9 mm	14 mm		6 mm	9 mm	14 mm
E6 / EV1 eloxiert <i>Silver galvanized</i>	oval oval	1.62.0501.0	1.62.0502.0	1.62.0503.0	eckig angular	1.62.0510.0	1.62.0511.0	1.62.0512.0
RAL 9016 EPS beschichtet <i>RAL 9016 powder coated</i>	oval oval	1.62.0504.0	1.62.0505.0	1.62.0506.0	eckig angular	1.62.0513.0	1.62.0514.0	1.62.0515.0
Edelstahl <i>Stainless steel</i>	oval oval	1.62.0519.0	1.62.0520.0	1.62.0521.0	eckig angular	1.62.0522.0	1.62.0523.0	1.62.0524.0

Hinweis:

- für Profilzylinder vorgerichtet

Please note:

- for euro profil cylinder

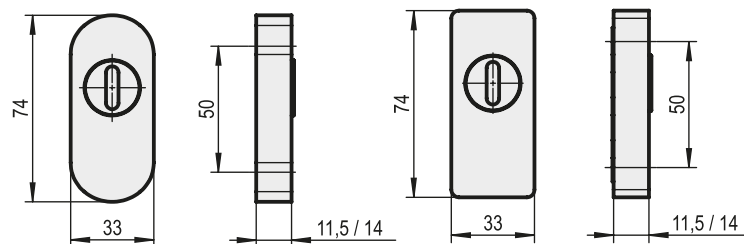

Oberfläche / Surface	Form / Design	Ausführung / Version		Form / Design	Ausführung / Version	
		11.5 mm	14 mm		11.5 mm	14 mm
E6 / EV1 eloxiert <i>Silver galvanized</i>	oval oval	1.62.0542.0	1.62.0546.0	eckig angular	1.62.0560.0	1.62.0564.0
RAL 9016 EPS beschichtet <i>RAL 9016 powder coated</i>	oval oval	1.62.0553.0	1.62.0547.0	eckig angular	1.62.0561.0	1.62.0565.0
Edelstahl <i>Stainless steel</i>	oval oval	1.62.0545.0	1.62.0549.0	eckig angular	1.62.0563.0	1.62.0567.0

Hinweis:

- für Profilzylinder vorgerichtet
- Stärke 11.5 mm = passend für Zylindervorstand max. 7.5 mm
- Stärke 14 mm = passend für Zylindervorstand max. 10.5 mm

Please note:

- for euro profil cylinder
- Version 11.5 mm for euro cylinder with maximum projection height of 7.5 mm
- Version 14 mm for euro cylinder with maximum projection height of 10.5 mm